

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF EXPRESS MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached herein are being deposited with the United States Postal Service on January 28, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **EL065189447US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Dianna Holmes



Attorney Docket No.: CISCP124/1691

First Named Inventor: Mark E. Millet



UTILITY PATENT APPLICATION TRANSMITTAL (37 CFR. § 1.53(b))

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

☒ Duplicate for
fee processing

Sir: This is a request for filing a patent application under 37 CFR. § 1.53(b) in the name of inventors:
Mark E. Millet, Guenter E. Roeck, Chrisanto Leano and James A. Clark

For: **Cable Plant Certification Procedure Using Cable Modems**

Application Elements:

- ☒ 25 Pages of Specification, Claims and Abstract
- ☒ 06 Sheets of **informal** Drawings
- ☒ 06 Pages Combined Declaration and Power of Attorney - executed

Accompanying Application Parts:

- ☒ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
- ☐ 37 CFR 3.73(b) Statement by Assignee
- ☐ Information Disclosure Statement with Form PTO-1449
 - ☐ Copies of IDS Citations
- ☐ Preliminary Amendment
- ☒ Return Receipt Postcard
- ☐ Small Entity Statement(s)
- ☒ Other: Associate Power of Attorney

Fee Calculation (37 CFR § 1.16)

	(Col. 1) NO. FILED	(Col. 2) NO. EXTRA	SMALL ENTITY RATE	FEE	OR	LARGE ENTITY RATE	FEE
BASIC FEE			\$345	\$345	OR	\$690	\$690
TOTAL CLAIMS	27 - 20 = 7		x 9 = \$		OR	x 18 = \$	\$126
INDEP CLAIMS	4 - 03 = 1		x 39 = \$		OR	x 78 = \$	\$78
[] Multiple Dependent Claim Presented			\$130	\$		\$260	\$
			Total	\$	OR	Total	\$894

* If the difference in Col. 1 is less than zero, enter "0" in Col. 2.

☒ Our check in the amount of \$894.00 is enclosed for excess claims and filing fees.

☒ Our check in the amount of \$40.00 is enclosed for assignment recordation fee.

☒ The Commissioner is authorized to charge any fees beyond the amount enclosed which may be required, or to credit any overpayment, to Deposit Account No. 50-0388 (Order No CISCP124/1691).

General Authorization for Petition for Extension of Time (37 CFR §1.136)

☒ Applicants hereby make and generally authorize any Petitions for Extensions of Time as may be needed for any subsequent filings. The Commissioner is also authorized to charge any extension fees under 37 CFR §1.17 as may be needed to Deposit Account No. 50-0388.

☒ Please send correspondence to the following address:

Customer Number: 022434

BEYER & WEAVER, LLP

P.O. Box 61059

Palo Alto, CA 94306



22434

PATENT TRADEMARK OFFICE

Date: January 28, 2000

Joseph M. Villeneuve

Joseph M. Villeneuve
Registration No. **37,460**

PATENT APPLICATION

CABLE PLANT CERTIFICATION PROCEDURE USING CABLE MODEMS

Inventors:

Mark E. Millet
1946 Miramonte Avenue
Mountain View, CA 94040
Citizen of the United States

Gunter E. Roeck
4108 Amos Way
San Jose, CA 95135
Citizen of Germany

Chrisanto Leano
4626 Marbella Court
San Jose, CA 95124
Citizen of the United States

James A.. Clark
4110 Three Chimneys Lane
Cumming, GA 30041
Citizen of the United States

Assignee:

Cisco Technology, Inc.

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306
Telephone (510) 843-6200

CABLE PLANT CERTIFICATION PROCEDURE USING CABLE MODEMS

Inventors:

Mark E. Millet, Guenter E. Roeck, Chrisanto Leano, and James A. Clark

5

BACKGROUND OF THE INVENTION

This invention relates to systems and methods for determining whether a cable network is compliant with a set of standards for two-way data communication.

10 In cable network systems (e.g., a hybrid fiber-coaxial (or HFC) plant), digital data is carried over radio frequency (RF) carrier signals. At the interfaces of a cable network are cable modems. These devices modulate digital data for "upstream" transmission on a broadband media and demodulate modulated RF signals for "downstream" reception of digital data.

15 Cable networks are composed of passive and active devices, each having a particular attenuation and frequency response. The overall frequency and amplitude response of a cable network system varies nearly continually. Cable lines are installed in new geographic areas, new cable modems and components are installed on existing segments of the network, the condition of existing lines deteriorates or improves, the performance of amplifiers, splitters, etc. changes, and so on. If the condition of the overall cable network or some subsection of it deteriorates below
20 certain physical margins, the system may become partially or wholly unusable. Because cable plants are large, complex, and dynamic, it is very difficult to model or predict their performance.

Currently, cable networks are tested for compliance with particular two-way communication standards before cable modems are brought on-line. The testing
25 typically involves defining an "X" point at or near the network's "headend" and then monitoring the frequency and power of signals received at that point. To evaluate the behavior of the entire network, signals are transmitted from numerous points on the cable network. Testing may be accomplished by putting a frequency analyzer at point "X" and then causing test signals to be generated at various locations on the network.
30 These test signals may be provided by a specialized piece of apparatus that connects to the system at particular locations. The apparatus may generate test signals at, for example, 45 dBmV scanned over a frequency range of 5-42 MHz, a standard frequency range for upstream data communications in cable networks. The spectrum analyzer at point "X" records the amplitude versus power spectrum it receives from

the source of the signal. This gives some indication of the frequency response of the cable network from the point where the signal is generated. A technician typically moves the signal generating apparatus from point-to-point on the network so that the frequency response of the network can be mapped for various positions over the network. If a problem is discovered, the technician may attempt to correct it by installing an equalizer at an appropriate location, for example.

A cable network suitable for two-way data communications should have a fairly linear response (increases in transmitted power cause a proportional increase in measured power at the X point). Such network should also have a relatively flat frequency response (the detected power level is relatively uniform over the frequency range being tested). Further, a compliant system should have relatively low noise levels. In specific approaches, compliance with these criteria may be determined by comparison of the network response against a threshold peak to valley (PtV) value across the upstream frequency range, a threshold carrier to noise (C/N) ratio, and/or an amplitude response factor.

One major drawback to the current method of testing a cable network for compliance is that the testing cannot be conducted while live two-way communication is taking place. Or at least the testing cannot be conducted over the entire upstream frequency range. At any given time during live communication, a particular frequency band is used for upstream communications. If the testing takes place in this band, the live data may become unreadable. As a result, complete testing, across the entire upstream frequency range, cannot be conducted while the cable network is in service. Of course, the cable service can be temporarily halted, but this results in a loss of revenue to the cable company and associated service providers.

Because complete testing cannot be easily conducted while a cable network is in service, the network may drift toward marginal performance and even become partially or wholly unusable without forewarning. Thus, it would be desirable to have an improved testing method and/or system that allowed complete cable network tests to be conducted without disrupting the cable service.

SUMMARY OF THE INVENTION

The present invention provides a system and method for testing, and thereby maintaining, a cable network during normal operation. It accomplishes this by interleaving test signals with live data traffic. Installed cable modems are used to

generate the test signals. During live communication, such modems send upstream data at allotted time periods. Periodically, there are time slots when no modem is transmitting on the network. During these times, in accordance with this invention, specific modems may be directed to transmit specific test signals. A controller such as a cable modem termination system directs specific modems to transmit signals at defined frequencies and powers during specific time slots. In this manner, the system can monitor the frequency response of the cable network at various locations, and thereby determine "on-the-fly" when maintenance or modification is required.

This invention provides at least three advantages over prior techniques for testing and maintaining cable networks. First, it does not require specialized maintenance/test apparatus. Instead, it employs equipment intended for data transport (e.g., cable modems). Second, testing may be automated so that technicians need not travel to remote sites on the cable plant and there install and monitor testing apparatus. They also need not do their own diagnosis with incomplete data as a much larger location sampling can take place. Third, the testing may be conducted without disrupting cable network service.

One specific aspect of the invention pertains to methods of testing a cable network while allowing transmission of live data traffic. This method may be characterized by the following sequence of operations: (a) selecting one or more cable modems on the cable network; (b) identifying a group of time increments during which cable modems on the network are not scheduled to transmit data; (c) instructing a first one of the one or more cable modems to send a first signal of a first frequency and power during a first one of the time increments; (d) measuring the power of the first signal received at a specified location on the cable network; (e) instructing the first cable modem to send a second signal of a second frequency during an available time increment; (f) measuring the power of the second signal received at the specified location on the cable network; and (g) recording a power versus frequency spectrum of the first modem at at least the first and second frequencies. Of course, the system may generate a detailed spectrum by measuring the power of a plurality of additional test signals generated by the first cable modem at a plurality of additional frequencies. And these additional signals may be sent during a plurality of additional time increments. Typically, the process will, at the specified location, measure and record a frequency versus power spectrum of one or more other cable modems during available time increments.

Prior to undertaking the testing, the system may need to identify a specific range of frequencies at which the one or more cable modems are to send signals. Preferably, this range spans at least a substantial portion of the upstream frequency

bandwidth allotted to cable modems. Testing in accordance with this invention becomes particularly interesting when the range of frequencies includes one or more frequencies in a frequency sub-band over which cable modems on the cable network are currently sending data.

5 Prior to undertaking the testing, the system may need to identify specific cable modems required to send test signals. In one embodiment, such modems are selected by first identifying separate geographic regions of the cable network for testing and then selecting at least one cable modem at each geographic location.

10 In addition to gathering raw spectra, the testing process may obtain statistical data pertaining to particular modems or their associated portions of the network. Such data includes, but is not limited to, variation over time (e.g., historical trends). In one embodiment, this involves requiring a modem to repeatedly transmit a particular signal (at a specified frequency). In one specific embodiment, this process involves (i) determining a deviation between the measured power of the first signal, at
15 the specified location, and an expected value of the measured power at that location; (ii) instructing the first cable modem to send another signal at the first frequency, but this time at a power adjusted from the first power by the magnitude of the deviation; and (iii) measuring and recording the power of the other signal, at the specified location on the cable network. This process may be repeated a sufficient number of
20 times to obtain the desired statistical data.

As mentioned, the testing may be used to determine whether a cable network is in compliance with a cable network standard. One such standard is DOCSIS, a standard for transmission of data over HFC cable networks. In accordance with this standard, the operation of instructing the first cable modem to send a first signal
25 involves sending a DOCSIS "ranging request" to the first cable modem.

Another aspect of this invention provides a cable network headend that allows testing of the cable network. Such headend may be characterized as including the following features: (a) an amplitude detector that can measure, at a specified location in the cable network, the amplitude of a signal received from a cable modem in the
30 cable network; (b) a MAC layer unit for identifying a group of time increments during which cable modems on the cable network are not scheduled to transmit data; and (c) test logic unit for instructing a cable modem on the cable network to send signals at at least two different frequencies during one or more of the time increments and for directing the headend to record the power of said signals at said different frequencies
35 as detected by the amplitude detector. The headend may often include other elements such as an upstream receiver in communication with the amplitude detector and a

downstream transmitter in communication with the MAC layer means. It may also include a frequency error detector that is analogous to the amplitude detector.

In a preferred embodiment, the test logic unit selects one or more cable modems in the cable network to generate signals at multiple frequencies, and those cable modems reside at separate geographic regions. Further, the test logic unit may select the frequencies at which the cable modem sends signals such that at least one of the signals is within a frequency band over which cable modems on the cable network are currently sending data. Still further, the test logic unit may determine, from one or more power versus frequency spectra of one or more of the cable modems in the cable network, whether the cable network complies with a cable network standard (e.g., DOCSIS).

These and other features and advantages of the invention will be described in detail below with reference to the associated drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of one example of a cable network system that may be tested in accordance with this invention.

Figure 2 is a block diagram of a cable modem termination system that may be used to implement the present invention.

Figure 3 is a block diagram depicting the structure of a MAP message suitable for use with the present invention.

Figure 4 is an interaction diagram illustrating a DOCSIS ranging procedure allowing the network to determine the performance of individual cable modems.

Figure 5 is a process flow diagram illustrating a sequence of operations that may be undertaken by a cable network headend in accordance with an embodiment of this invention.

Figure 6 is a depiction of a frequency response table that may be provided by a system of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Since the late 1980's the cable TV industry has been upgrading its signal distribution and transmission infrastructure. In many cable television markets, the infrastructure and topology of cable systems now includes fiber optics as part of its signal-transmission component. The use of fiber optics has accelerated the pace at which the cable industry has taken advantage of the inherent two-way communication capability of cable systems. The cable industry is now developing reliable and efficient two-way transmission of digital data over its cable lines at speeds orders of magnitude faster than those available through telephone lines, thereby allowing its subscribers to access digital data for uses ranging from Internet access to cable commuting. While cable TV systems have always had the ability to send data downstream, *i.e.* from a cable TV hub to subscribers' homes, cable TV systems can now send data upstream, *i.e.* from individual subscribers' homes to the hub. This new upstream data transmission capability enabled cable companies to use set-top cable boxes and provided subscribers with "pay-per-view" functionality, *i.e.* a service allowing subscribers to send a signal to the cable system indicating that they want to see a certain program.

Figure 1 is a block diagram of a two-way hybrid fiber-coaxial (HFC) cable system 101 including cable modems and a cable modem termination system (CMTS) 104. The depicted system includes three separate distribution networks 121A-C connected to three different upstream ports of CMTS 104.

The described HFC cable system may be used for two-way transmission of digital data such as Internet data, digital audio, or digital video data, for example, from one or more external sources (not shown) available through CMTS 104. The digital data is carried over radio frequency (RF) carrier signals. Cable modems convert digital data to a modulated RF signal and convert the RF signal back to digital form. The conversion is done at two points: at the subscriber's home by a cable modem and by a CMTS located at the head end. The CMTS converts the digital data to a modulated RF signal that is carried over the transmission system, which is, in one embodiment, a set of fiber and coaxial lines to the subscriber premises. The cable modem then demodulates the RF signal and feeds the digital data to a computer. On the return path, the operations are reversed. The digital data is fed to the cable modem, which converts it to a modulated RF signal (it is helpful to keep in mind that the word "modem" is derived from modulator/demodulator). Once the CMTS receives the RF signal, it demodulates it and transmits the digital data to an external source.

The main distribution component of HFC cable system 101 is a hub 102 (also referred to as a “headend”) which can typically service about 40,000 subscribers or end-users. Hub 102 contains several components shown in Figure 1. One component is the cable modem termination system, or CMTS, 104 for transmitting data (sending it downstream to users) and receiving data (receiving upstream data originating from users). From CMTS 104, separate downstream and upstream lines are used for sending and receiving data. Downstream signals pass through an upconverter 123 and onto other components on their way to destination cable modems. Upconverter 123 converts the frequency at which downstream signals are carried from a channel and service-independent intermediate frequency to a channel specific radio frequency. The downstream RF signals are broadcast over the cable plant and ultimately received at the cable modems. This figure shows cable modems as blocks 105, 106, 107A-C, 108, 109, 110, 111, 112, and 113. The components on the downstream path between upconverter 123 and the cable modems are not depicted.

On the upstream path, data from some of the cable modems enters cable plant 101 via distribution networks 121A-C. Each distribution system will have its own topology, which varies as a function of the local neighborhood geography, the number and type of cable modems in the distribution network, etc. As a result signals from different modems on a given distribution network are attenuated by different amounts on the upstream path.

Data from modems on the distribution networks is typically transmitted as electrical signals over conventional coaxial cables 120A-C, also referred to as a trunk lines. In some instances, coaxial trunk lines are being replaced with optical fiber. Data traveling upstream from trunk lines 120A-C reaches fiber nodes 118A-C, which convert the electrical signals to optical signals that can be transmitted over fiber optic cables 116A-C. Typically fiber optic cable 116A-C contains pairs of cables carrying data in opposite directions. These cables typically run for as long as 100 km and are used to carry data for most of the distance between the neighborhood distribution networks and hub 102.

Hub 102 can typically support up to 80 fiber nodes and each fiber node can support up to 500 or more subscribers. Thus, there are normally multiple fiber optic cables emanating from hub 102 (only three are shown to simplify the illustration). Note that in many systems, fiber capacity (and consequently the number of potential subscribers) is increasing because dense wave-division multiplexing technology is being employed. DWDM is a technique for transmitting data via more than one wavelength of light on the same fiber.

Data from fiber optic cables 116A-C enters hub 102 via fiber transceivers 114A-C used to convert optical signals to electrical signals for processing in hub 102. Focusing on the top distribution network 121A, upstream data from optical transceiver 114A passes through attenuators 125A and 127A before passing through a splitter 129A and onto a port of CMTS 104. As shown, parallel paths exist for distribution networks 121B and C.

To allow verification of the downstream path, hub 102 includes diplex filters 131A-C, which are connected to the downstream path (not shown) and to attenuators 133A-C. Cable modems 107A-C serve as part of the verification system. They are attached to diplex filters 131A-C to allow the CMTS to confirm that a modem can actually transmit on the associated distribution network. Thus, the network subsystem given by diplex filters 131A-C and cable modems 107A-C assist in verifying the operation of cable plant 101 and in isolating problems that arise on that plant. As shown, upstream data from the modems passes through one of diplex filters 131A-C and then onto one of attenuators 133A-C before entering one of splitters 129A-C.

As noted, the distribution networks have various topologies. Topological differences in paths from various modems to hub 102 result in different attenuation levels. Yet, CMTSs are designed to work at single power level. For example, CMTS 104 may be designed to receive signals centered at 0 dBmV amplitude. If all modems transmitted at the same power level, some signals received at CMTS 104 would be well above the required power level and some would be well below that level. To account for the effects of topological variations in the distribution networks, many cable systems require that different modems transmit at different power levels. The particular transmission power levels are selected to cause all signals to arrive at the CMTS with the same power level. The DOCSIS standard for transmission defines a procedure for adjusting modem transmission power such that the received power at the headend is constant. This procedure, called ranging, is described below. Note that DOCSIS is an interim standard establishing the protocol for two-way communication of digital data on cable systems defined and adopted by a consortium of industry groups, and is widely-followed in the field of cable modem data communication.

Figure 1 illustrates a hypothetical set of modem power levels chosen such that transmissions from all modems will reach CMTS 104 centered at 0 dBmV. As shown, transmissions from modem 105 are made at +31 dBmV and those from modem 106 are made at +48 dBmV. This difference results from different attenuation levels on the paths from these modems through distribution network

121A. Signals from modem 105 are less attenuated than signals from modem 106. In the end, all transmissions, regardless of source modem, reach optical transmitter 118A at +17 dBmV. Similar results are illustrated for distribution networks 121B and 121C and their associated cable modems.

- 5 Because signals from all modems on a given distribution network experience the same attenuation while passing through the fiber optic and hub sections of the network, no further modem specific adjustments are required. As shown in Figure 1, transmissions passing through optical components 118A, 116A, and 114A lose 4 dB so that they enter hub 102 as +13 dBmV electrical signals. Other optical sections
- 10 have different effects. For example, optical components 118B, 116B, and 114B together amplify signals by 1 dB and optical components 118C, 116C, and 114C together amplify signals by 14 dB. Because the different fiber optic segments attenuate/amplify by differing amounts, hub attenuators 125A-C attenuate by different amounts so that all transmissions, regardless of source modem or fiber node, reach the
- 15 CMTS at the same power level. Thus, all signals upstream from attenuators 125A-C should have the same power level (at the same position vis-à-vis CMTS 104). As shown, all transmissions leave attenuators 125A-C at +10 dBmV.

- As mentioned, a hub can measure all signals at an "X" point. This point should be chosen at a location where all transmissions are expected to have the same
- 20 power level with respect to the CMTS – regardless of fiber node or source modem. More precisely, the X point should be chosen, with respect to a CMTS amplitude detector location, so that power level is linearly related in a known manner that is consistent across all nodes feeding the CMTS. Usually, the X point will be at or proximate the CMTS. One common location is on a line card in the CMTS. In
- 25 Figure 1, the X point (indicated by reference numbers 135A-C) for each CMTS input port is located between attenuators 125A-C and attenuators 127A-C, respectively. At these points, the power level is expected to be +10 dBmV. Amplitude detectors may be positioned at these locations (or in the CMTS) so that they can measure power levels during testing. Note that in Figure 1, the X points could be chosen to be any
- 30 locations upstream of attenuators 125A-C.

- Some of the functions of CMTS 104 include (1) interfacing to a two-way data communications network; (2) providing appropriate media access control or MAC level packet headers for data on the RF interface of a cable system; and (3)
- 35 modulating and demodulating the data to and from the cable system. As mentioned, the cable modem termination system may also implement some or all of the testing methods of this invention. Figure 2 presents a block diagram showing hardware and software that may be employed in CMTS 104. As shown, a Data Network Interface

202 provides an interface between an external data source and the cable system. External data sources transmit data to data network interface 202 via optical fiber, microwave link, satellite link, or through various other media. Interface 202 may include hardware and/or software for interfacing to various network types such as, for example, Ethernet, ATM, frame relay, etc. as appropriate.

In the specific embodiment as shown in Figure 2, CMTS 104 provides functions on three network layers including a physical layer 232, a Media Access Control (MAC) layer 230, and a network layer 234. Generally, the physical layer is responsible for receiving and transmitting RF signals on the cable plant. Hardware portions of the physical layer include a downstream modulator and transmitter 206 and an upstream demodulator and receiver 214. The physical layer also includes software 286 for driving the hardware components of the physical layer.

Upstream optical data signals (packets) arriving via an optical fiber node 210 are converted to electrical signals by a receiver 212 (see receivers 114A-C of Figure 1). Next, the upstream information packet (RF electrical signals) is demodulated by the demodulator/receiver 214 and then passed to MAC layer block 230. A primary purpose of MAC layer 230 is to encapsulate, with MAC headers, downstream packets and decapsulate, of MAC headers, upstream packets. In one embodiment, the encapsulation and decapsulation proceed as dictated by the above-mentioned DOCSIS standard for transmission of data or other information. The MAC headers include addresses of specific modems created by a MAC layer block 230 in CMTS 104. Note that the cable modems also include MAC addressing components. In the cable modems, these components encapsulate upstream data with a header containing the MAC address of the destination modem.

MAC layer block 230 includes a MAC hardware portion 204 and a MAC software portion 284, which together serve the above-described functions. In a preferred embodiment, MAC hardware portion 204 is distinct from the router's general purpose microprocessor and is dedicated to performing some MAC layer functions.

After the upstream information has been processed by MAC layer block 230, it is then passed to network layer block 234. Network layer block 234 includes switching software 282 for causing the upstream information packet to be switched to an appropriate data network interface on data network interface 202. When a packet is received at the data network interface 202 from an external source, the switching software within network layer 234 passes the packet to MAC layer 230. MAC block 204 transmits information via a one-way communication medium to downstream

modulator and transmitter 206. Downstream modulator and transmitter 206 takes the data (or other information) in a packet structure and converts it to modulated downstream frames, such as MPEG or ATM frames, on the downstream carrier using, for example, QAM modulation (other methods of modulation can be used such as CDMA (Code Division Multiple Access) OFDM (Orthogonal Frequency Division Multiplexing), FSK (FREQ Shift Keying)). The return data is likewise modulated using, for example, QAM 16 or QSPK. Data from other services (e.g. television) is added at a combiner 207. An optical converter 208 converts the modulated RF electrical signals to optical signals that can be received and transmitted via Fiber Node 210 to the cable modem hub.

It is to be noted that alternate embodiments of the CMTS (not shown) may not include network layer 234. In such embodiments, a CMTS device may include only a physical layer and a MAC layer, which are responsible for modifying a packet according to the appropriate standard for transmission of information over a cable modem network. The network layer 234 of these alternate embodiments of CMTS devices may be included, for example, as part of a conventional router for a packet-switched network.

In a specific embodiment, the network layer of the CMTS is configured as a cable line card coupled to a standard router that includes the physical layer block 232 and MAC layer block 230. Using this type of configuration, the CMTS is able to send and/or receive IP packets to and from the data network interface 202 using switching software block 282.

As shown in Figure 2, CMTS 104 includes a central hardware block 250 including one or more processors 255 and memory 257. These hardware components interact with software and other hardware portions of the various layers within the CMTS. They provide general purpose computing power for much of the software. Memory 257 may include, for example, I/O memory (e.g. buffers), program memory, shared memory, etc. Hardware block 250 may physically reside with the other CMTS components. In one embodiment, the software entities 282, 284, and 286 are implemented as part of a network operating system running on hardware 250. Further, the testing functions of this invention are preferably implemented in software as part of the operating system. In Figure 2, such software is represented by block 289. Of course, the testing logic could reside in hardware, software, or some combination of the two.

Note that the term "testing," as used herein, refers to any type of testing that characterizes one or more portions of a cable network. Preferably, the testing covers

many different regions of the cable network. Preferably, it also provides power versus frequency spectra for various points or sections on the cable network.

In one embodiment, testing is conducted as follows. Testing software 289 is closely associated with MAC layer software 284. It determines that a particular
5 modem should generate a test signal at a particular amplitude and frequency. With the aid of conventional MAC layer logic, the test software schedules a time when the test signal is to be sent. It also uses the MAC layer logic to inform the modem (likely by the ranging protocol if DOCSIS is used) of the particular frequency and power at which to transmit the test signal. When the modem replies, an amplitude estimator
10 216 (associated with upstream demodulator and receiver 214) measures the amplitude and frequency of the signal. This information is then provided to MAC layer logic 230, which relays it to test software 289. That software may then analyze the data to determine if there is a problem. Before it can make an assessment, it may have to take in enough data to identify spectra of multiple modems in the network. As
15 discussed below, these spectra may be stored in the form of a logical table. In an alternative embodiment, test software 289 outputs the results of the testing (with or without analyzing the results). In this embodiment, some form of an output device such as a monitor or printer attaches to CMTS 104.

As indicated, MAC layer logic block 230 may control the time slot allocation
20 and ranging procedures required by the DOCSIS standard for transmission of data. The need for these procedures can be understood as follows. On the downstream cable data channel, data is broadcast (or multicast) by a CMTS to cable modems served on that downstream channel. However, sending upstream data is not so simple. Upstream transmission is complicated by the fact that the upstream path is
25 used as a multiple access channel shared by the large group of cable modems (on that channel) to communicate with the CMTS. To prevent collisions, the upstream channel is time-slotted and cable modems need to contend for gaining access to the CMTS in this shared channel. This time slotting procedure is sometimes referred to as Time Division Multiple Access (TDMA).

Typically, time slots are scheduled using a "minislot" as the basic unit of
30 scheduling. The CMTS remotely schedules each and every minislot on the upstream channel. Some contiguous minislots are grouped together as a unicast data slot meant to be used by a specific cable modem for sending its data upstream. Some minislots are marked as contention slots that can be used by any cable modem to send
35 ranging/bandwidth requests upstream to the CMTS. The CMTS conveys this minislot allocation information (to the set of modems sharing the upstream channel) ahead of

time using bandwidth allocation "MAP messages" that are periodically broadcast on the downstream channel.

Figure 3 illustrates a sample MAP message 342 that may be used with the present invention. MAP message 342 includes various time slots or groups of time slots representing grants for upstream transmission to various cable modems in the plant. In the example shown, a group of minislots 344 have been granted to a first cable modem. Similarly, a group of later time slots 346 have been granted to a second cable modem. The granted time slots may be of arbitrary length from a few tens of microseconds to a few milliseconds. Other slots for other cable modems may be specified in the remainder (indicated by reference numeral 348) of MAP 342. Now, in accordance with this invention, the CMTS may decide to set aside particular minislots for testing. For example, a minislot 350 may be reserved for testing. Specifically, the first cable modem may be required to send a test signal at its optimum power level (as determined by the topology of the distribution network, for example) and 18 MHz during the time period designated by minislot 350. Further, all minislots 346 may be set aside for the second cable modem to send test signals at its optimum power level and at a frequency of 9 MHz.

Figure 4 presents an interaction diagram depicting the interactions between a cable modem termination system 104 and a cable modem 105 during ranging, in accordance with a cable network standard such as DOCSIS. DOCSIS ranging may be understood as follows. Among the time slots mapped by the CMTS is a slot called the "station maintenance" time slot (SMTS). In many implementations, each cable modem receives at least one SMTS every 30 seconds. When a cable modem receives an SMTS it must transmit a ranging request (RNG-REQ) message which is used by the CMTS in order to determine if the cable modem is operational and to maintain the link to that cable modem. If the cable modem does not respond to the SMTS after 16 tries the cable modem is assumed to be off.

As illustrated in Figure 4, the procedure is initiated by the expiration of a 30 second timer as illustrated at 403. Note that the 30 seconds is an arbitrary value and may be varied from implementation to implementation. When CMTS 104 determines that the timer has expired at 403, it generates and sends an SMTS message at 405. That SMTS message then travels over the cable network at 407 where it is received by destination cable modem 105.

Upon receipt of an SMTS message, cable modem 105 generates a standard ranging request message at 409. The cable network transmits the ranging request upstream, back to the headend at 411.

Upon receipt of the ranging request, CMTS 104 compares the received frequency and amplitude of that request against an expected frequency and amplitude at 413. Depending upon whether CMTS 104 identifies any significant deviation between the actual and expected frequency and amplitude, the CMTS may decide to abort the service of cable modem 105. This would occur if the frequency and/or power (or some combination thereof) deviated from the expected values by more than a threshold value. This threshold may vary from standard to standard and implementation to implementation. Assuming that the deviation falls within a safe threshold, CMTS 104 will generate a ranging response message at 414 and send that message back downstream to cable modem 105 at 415.

In accordance with the DOCSIS standard, the ranging response message will include various pieces of information including a time offset, a frequency error, a power error, and a keep alive message. The keep alive message instructs the cable modem to remain alive and continue transmitting data as necessary. The time offset indicates how long the message from the cable modem took to travel to the CMTS 104. The frequency and power errors are deviations in the detected frequency and power from expected values. When cable modem 105 notes these errors, it will adjust its frequency and power as necessary to compensate for the deviation(s). See 417. After the 30 second timer has once again expired, the process begins again as indicated by the return of process control at 419.

Figure 5 is a process flow diagram illustrating how a CMTS implemented in accordance with this invention may test a cable network. A process 502 begins at a block 504 with the CMTS choosing a first modem and a first associated frequency for testing. The CMTS must then notify that modem that it is to send a signal at the specified frequency. It is entirely possible that that frequency is different from the frequency at which the modem and its peers are currently transmitting data upstream. Numerous procedures may be employed to cause the modem to transmit at the new "test" frequency. Using the DOCSIS standard, the CMTS may send an update UCD message through a new frequency. UCD refers to "Upstream Channel Descriptor" which instructs the modem and at least some of its peers to begin transmitting at a new frequency identified in the UCD message. This operation is depicted at block 506 in Figure 5.

Typically, the remaining modems should continue transmitting live data at the original frequency that was in use prior to the UCD message. This may be accomplished by sending a second UCD message, subsequent to receipt of the test signal(s). This second UCD message would instruct the modems to return to the original frequency. In an alternative approach, a modified UCD message (or other

message format) contains instructions specific to the test modem, and does not affect the other modems. Such message would instruct only the test modem to change its frequency. In some cases, depending upon the test frequency, the test modem and its peers will all transmit live data traffic at the newly identified frequency.

5 As mentioned in conjunction with the discussion of Figure 4, the DOCSIS standard issues new SMTS messages every 30 seconds or so. A 30 second timer is indicated at 508 of process 502. At the next 30 second time trigger, CMTS 104 issues an SMTS message to the modem specified at 504. See block 510. Thereafter, the test
10 modem will reply with a ranging request message (assuming that the network is proceeding under the DOCSIS approach). Due to the update UCD message sent by CMTS, the test modem's response should be a signal having the specified test frequency. At 512, the CMTS receives the ranging request message from the selected modem. It then measures the amplitude, frequency, and timing offset of the request at 514. In the embodiment depicted in Figure 2, the amplitude is measured by
15 amplitude estimator 216 (which also measures frequency and timing offset) associated with upstream receiver 214. Note that after the CMTS measures the amplitude, it may also add the amplitude measurement to a frequency response table that it is generating. Such table will be described in more detail with reference to Figure 6.

20 With the measured amplitude in hand, the CMTS (preferably through the operations of software blocks 284 and 289 shown in Figure 2) determines whether the amplitude and/or frequency of the ranging response from the modem deviates from an expected value. In a typical cable system, as explained above, the distribution network is designed so that signals from all cable modems, no matter how
25 geographically disparate, arrive at the optical transmitter having a single amplitude (e.g., 10 dBmV). After the signal passes upstream through the optical and other components to the CMTS, it should have a specified amplitude. However, due to the myriad of dynamic changes taking place in the cable network, the signal may vary from the expected amplitude by some amount. In the case of the testing described
30 herein, the CMTS determines the magnitudes of deviations associated with particular frequencies for various segments or points of the cable network.

In one embodiment of this invention, the CMTS simply measures and records a deviation from the expected amplitude at desired frequency and incorporates that in part of a spectrum for the modem or network segment of interest. However, using the
35 DOCSIS standard, additional statistical information can be obtained about the modem or its associated network section. For example, the modem can be instructed to

repeatedly transmit at the same frequency. If the amplitude varies during successive ranging requests, it may indicate that there is a fault in the network.

Returning to process 502 of Figure 5, the CMTS sends a ranging response to the test modem at 516. Using the DOCSIS standard, the response will specify a change in amplitude corresponding to the detected deviation between the amplitude of the last received signal from a test modem and the amplitude expected by the CMTS. The test modem is expected to apply this correction before sending its next ranging request.

After sending the ranging response and updating the frequency response table, the CMTS will determine whether it has reached the last test signal for the modem under consideration. *See* decision block 518. Assuming that other signals are required to complete the analysis (using the modem under consideration), the CMTS next determines whether the modem under consideration should send another signal at the same frequency. *See* decision block 520. As mentioned, it may be desirable to cause the test modem to transmit multiple signals at the same frequency to identify faults or to gain statistical information such as the mean and standard deviation of the amplitude variation. Assuming that the CMTS requires that the modem generate another signal on the same frequency, process control returns to 508 where the system awaits expiration of the next timer increment (e.g., the next 30 second trigger). From there, the CMTS issues another SMTS message at 510, receives the ranging request at 512, and sends a ranging reply at 516 as necessary.

Assuming on the other hand that no further testing is required at the frequency of interest, the CMTS must instruct the modem to move to a different frequency before transmitting the next test signal. If this is the case, decision 520 is answered in the negative. At that point, process control returns to 506 where the system sends an update UCD message for the new frequency. Then, at the expiration of timer 508, the next SMTS message is issued and the modem responds with a ranging request at the new frequency of interest. The received amplitude is measured at 514 and any deviation from expected value is recorded in the frequency response table. This allows a power spectrum for the cable modem under test to be generated. This CMTS may also send a ranging response to the modem at that point.

In the above-described manner, the modem under test is caused to issue test signals at a series of frequencies. From these signals, the CMTS may generate a power versus frequency spectrum for the test modem. This may provide insight into the behavior of the specific modem and/or the region of the cable network that it is associated with. Note that in alternative implementations, the CMTS may probe

multiple modems concurrently at one or more frequencies. In other words, it may obtain data points for the power spectrum of a second and possibly third modem before the spectrum is completed for a first modem.

After the last test signal of the last frequency is considered for the modem under consideration, decision block 518 is answered in the affirmative. At that point, the CMTS must determine whether the current modem is the last modem to be considered. See decision block 522. If additional modems are to be considered, process control returns to 504 where the next modem is chosen together with a first test frequency for that modem. Thereafter the process continues as described above.

Ultimately, all the modems identified for testing are considered and their power versus frequency spectra recorded. At that point, decision 522 is answered in the affirmative. The CMTS may then perform an analysis of the completed frequency response table at 524. Alternatively, the frequency response table may simply be output and an appropriate professional conducts the analysis. Either the CMTS logic or the cable network professional analyzes the frequency response table to identify any region of the cable network that may be moving towards marginal performance. When such a region is localized, the CMTS may conduct further, more stringent, testing of that region of the network. For example, it may test additional modems in that region to determine whether the marginal performance is the result of a single modem or a wider problem in the local distribution network. Ultimately, or in addition, a technician may be dispatched to the problem region where he or she can conduct further tests to specifically identify and/or correct the problem. The technician may analyze a specific cable modem with the use of a hand-held personal digital assistant or with some other functionality available at the cable modem of interest. Note that automatic analysis may be performed by test software 289 (illustrated in Figure 2) alone or in conjunction with other software and/or hardware in the headend.

The terms "live data" and "live data traffic" used as above refer to normal upstream data communications used in a cable network. The data traffic may correspond to any kind of digital transmissions. Preferably, it refers to packetized data including packetized audio and/or video data.

Figure 6 illustrates one example of a frequency response table that may be output and/or used by the CMTS logic of the present invention. In the example illustrated in Figure 6, the modems of interest are tested at 5 frequencies ranging from 5.4MHz to 13MHz. In the example presented in Figure 6, five different modems have been tested. These are given modem numbers 2, 7, 11, 14, and 18. For each

modem, starting at 5.4MHz, the deviation of the detected amplitude from the expected amplitude is recorded. For each of the five modems under test, there is no deviation from the expected amplitude at 5.4MHz. In this hypothetical example, the tests were started after all modems were aligned to 5.4 MHz.

- 5 At the next successively higher frequency of interest, any additional deviation, beyond the deviation measured at 5.4 MHz in the first column is recorded. For example, for cable modem number 2, the detected amplitude is 2 dB below the anticipated amplitude. For cable modem number 7, the detected amplitude is 2 dB above the anticipated level.
- 10 Following along with cable modem number 2, the next successively higher frequency has an amplitude value of “-4”dB. This indicates that the recorded amplitude is yet another 4 dB below the expected amplitude (in comparison to the next lower frequency). The amplitude at the third frequency of interest is a total of 6 dB below the anticipated amplitude for that frequency. Then, at the fourth frequency
- 15 of interest, the amplitude of the signal is only 4 dB below the anticipated value (indicated by a value of “+2” in the fourth column). Finally, at the fifth frequency of interest, 13MHz, the deviation between the actual and expected amplitudes is 2 dB to the negative (indicated by a value of “+2” in the fifth column of the frequency response table).
- 20 A graph is provided to the right-side of the frequency response table to illustrate the spectrum for cable modem 2. Similar spectra are provided for the other four cable modems of interest.

For cable modem number 7, it can be seen that there is no deviation between the actual and expected amplitude at 5.4 MHz. Then, at the next highest frequency,

25 there is a deviation of +2 dB from the expected value. At the next two higher frequencies, the amplitude remains 2 dB above the expected value. Then, at 13 MHz, the deviation between actual and expected amplitude returns to 0. The power spectra of the other cable modems are similarly recorded.

- 30 An analysis policy may specify particular thresholds for indicating a modem (or a nearby region of the cable network) that requires further analysis and/or inspection. For example, a deviation of 6 dB from the expected amplitude may trigger such further analysis/inspection. In such case, modems 2 and 11, and possibly their respective network localities and distribution networks, would be subject to further inspection.

In alternative embodiments, tables such as the one shown in Figure 6 may be generated for other parameters such as frequency error and timing offset. In principle, the invention applies directly to detecting these parameters in the same manner that it applies to amplitude/power detection.

- 5 Although the foregoing invention has been described in some detail for purposes of clarity of understanding, it will be apparent that certain changes and modifications may be practiced within the scope of the appended claims. For example, while the time increments discussed above generally refer to time increments specified via MAP structures in DOCSIS standard, other techniques for identifying
- 10 available time slots may be employed. Further, while ranging was described above, other techniques for causing modems to transmit signals at predefined frequencies and amplitudes may be employed.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202

CLAIMS

What is claimed is:

1. A method of testing a cable network, using one or more cable modems
5 on the cable network, while allowing live data traffic, the method comprising:
 - (a) identifying a group of time increments during which cable modems on the network are not scheduled to transmit data;
 - (b) instructing a first one of the one or more cable modems to send a first signal of a first frequency at a first power during a first one of the time
10 increments;
 - (c) measuring the power of the first signal received at a specified location on the cable network;
 - (f) (d) instructing the first cable modem to send a second signal of a second frequency during an available time
15 increment;
 - (e) measuring the power of the second signal received at the specified location on the cable network; and
 - (f) recording a power versus frequency spectrum of the first modem at at least the first and second frequencies.
- 20 2. The method of claim 1, further comprising, at the specified location, measuring the power of a plurality of additional signals generated by the first cable modem at a plurality of additional frequencies.
- 25 3. The method of claim 2, wherein the plurality of additional signals generated by the first cable modem are sent during a plurality of additional time increments.
- 30 4. The method of claim 1, further comprising, at the specified location, measuring and recording a frequency versus power spectrum of a second one of the cable modems during available time increments.
5. The method of claim 1, further comprising:
 - (i) determining a deviation between the measured power of the
35 first signal, at the specified location, and an expected value of the measured power at that location;

(ii) instructing the first cable modem to send another signal at the first frequency, but this time at a power adjusted from the first power by the magnitude of the deviation; and

(iii) measuring and recording the power of the other signal, at the specified location on the cable network.

6. The method of claim 5, further comprising repeating (i)-(iii) a number of times to obtain statistical data.

7. The method of claim 1, wherein the testing determines whether the cable network is in compliance with a cable network standard.

8. The method of claim 1, wherein the testing determines whether the cable network meets DOCSIS requirements, and wherein instructing the first cable modem to send a first signal comprises sending a DOCSIS ranging request to the first cable modem.

9. The method of claim 1, comprising identifying a range of frequencies at which the one or more cable modems are to send signals.

10. The method of claim 9, wherein the range of frequencies spans at least a substantial portion of the upstream frequency bandwidth allotted to cable modems.

11. The method of claim 9, wherein the range of frequencies includes one or more frequencies in a frequency sub-band over which cable modems on the cable network are currently sending data.

12. The method of claim 1, wherein the one or more cable modems are selected by a method comprising:

identifying separate geographic regions of the cable network for testing; and selecting at least one cable modem at each geographic location.

13. A method of testing a cable network while allowing live data traffic, the method comprising:

(a) instructing a first cable modem to send signals of a defined frequency and power during a first group of time increments at which times cable modems on the network are not scheduled to transmit data;

(b) measuring and recording at least one of the frequency and the power of the signals from the first cable modem;

(c) instructing a second cable modem to send signals of a defined frequency and power during a second group of time increments at which times cable modems on the network are not scheduled to transmit data; and

(d) measuring and recording at least one of the frequency and the power of the signals from the second cable modem.

14. The method of claim 13, wherein the signals from the first and second cable modems are measured at a single specified location on the cable network.

15. The method of claim 13, wherein the testing determines whether the cable network is in compliance with requirements of DOCSIS.

16. The method of claim 13, comprising identifying a range of frequencies at which the first and second cable modems are to send signals.

17. The method of claim 16, wherein the range of frequencies spans at least a substantial portion of the upstream frequency bandwidth allotted to cable modems.

18. The method of claim 16, wherein the range of frequencies includes one or more frequencies in a frequency sub-band over which cable modems on the cable network are currently sending data.

19. A cable network headend allowing testing of the cable network, the headend comprising:

(a) an amplitude detector that can measure, at a specified location in the cable network, the amplitude of a signal received from a cable modem in the cable network;

(b) a MAC layer means for identifying a group of time increments during which cable modems on the cable network are not scheduled to transmit data; and

(c) test logic means for instructing a cable modem on the cable network to send signals at at least two different frequencies during one or more of the time increments and for directing the headend to record the power of said signals at said different frequencies as detected by the amplitude detector.

20. The headend of claim 19, further comprising an upstream receiver in communication with the amplitude detector; and
a downstream transmitter in communication with the MAC layer means.

21. The headend of claim 19, wherein the test logic means selects one or more cable modems in the cable network to generate signals at multiple frequencies.

22. The headend of claim 21, wherein the test logic means selects multiple cable modems and the individual selected cable modems reside at separate geographic regions.

23. The headend of claim 19, wherein at least one of the frequencies at which the cable modem sends signals is within a frequency band over which cable modems on the cable network are currently sending data.

24. The headend of claim 19, wherein the test logic means determines from one or more power versus frequency spectra of one or more of the cable modems in the cable network whether the cable network complies with a cable network standard.

25. A cable network headend allowing testing of the cable network, the headend comprising:

(a) an amplitude detector that can measure, at a specified location in the cable network, the amplitude of a signal received from a cable modem in the cable network;

(b) one or more processors configured to (i) identify a group of time increments during which cable modems on the cable network are not scheduled to transmit data and (ii) to generate instructions to cause specific cable modems on the cable network to transmit signals of specified power and frequency, which signals can be measured by the amplitude detector; and

(c) memory coupled to the one or more processors and storing power and frequency data for the specific cable modems.

26. The cable network headend of claim 25, further comprising a modulator/transmitter and a demodulator/receiver.

27. The cable network headend of claim 25, wherein the power and frequency data are power versus frequency spectra over a range of upstream transmission frequencies for the specific cable modems.

HFC PLANT CERTIFICATION PROCEDURE USING CABLE MODEMS

ABSTRACT OF THE DISCLOSURE

- 5 signals with live data traffic. Installed cable modems are used to generate the test signals. During live communication, such modems send upstream data at allotted time periods. Periodically, there are time slots when no modem is transmitting on the network. During these times, specific modems may be directed to transmit specific test signals. A controller such as a cable modem termination system directs specific
- 10 modems to transmit signals at defined frequencies and powers during specific time slots. In this manner, the system can monitor the frequency response of the cable network at various locations, and thereby determine “on-the-fly” when maintenance or modification is required.

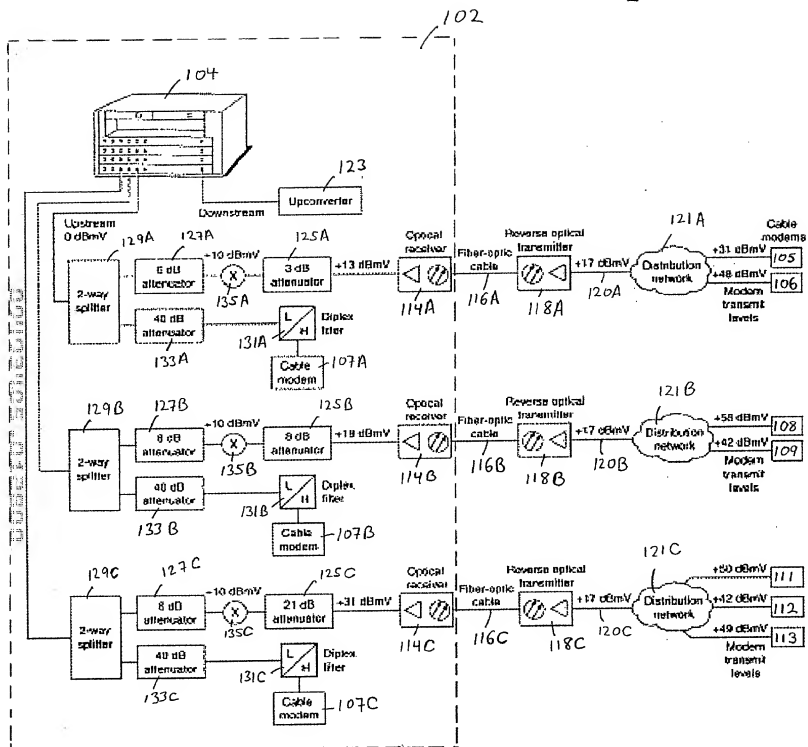


Figure 1

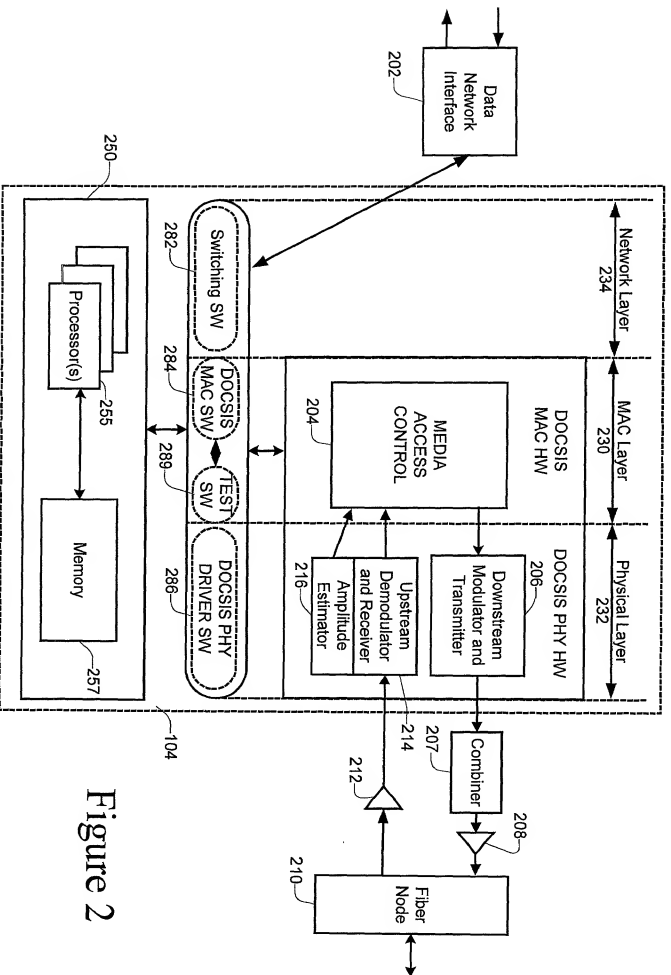


Figure 2

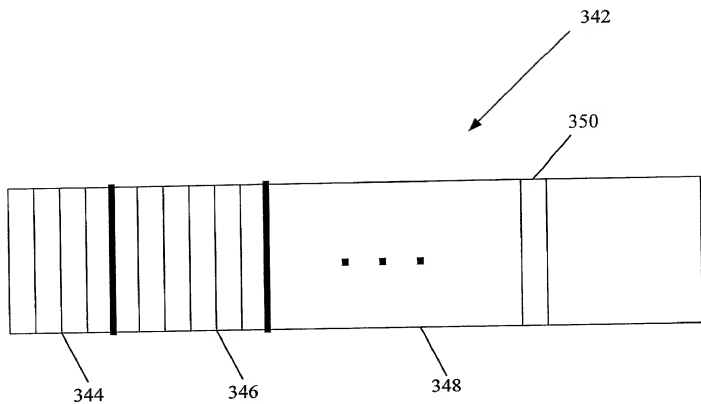


Figure 3

CMTS 104

CABLE
MODEM 105

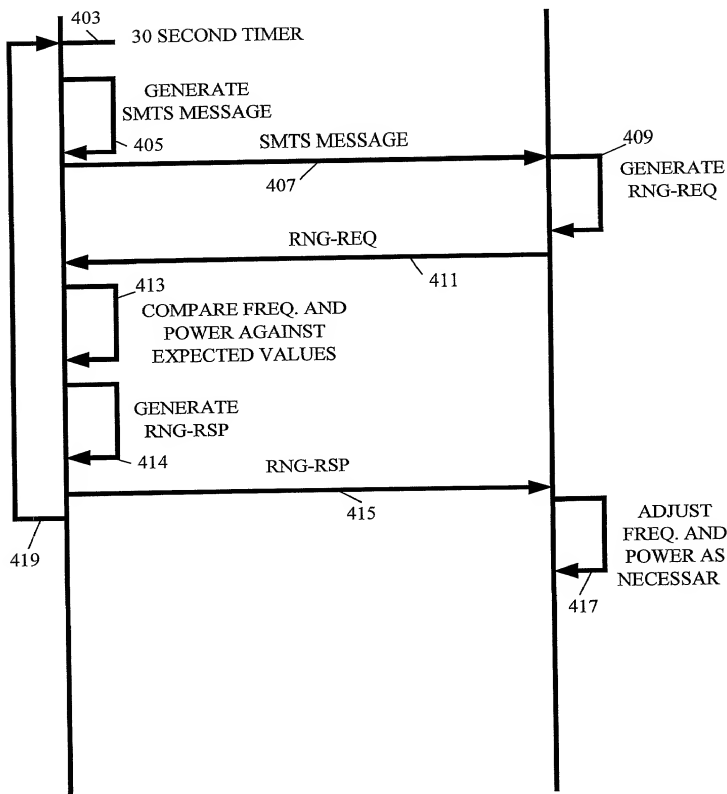


Figure 4

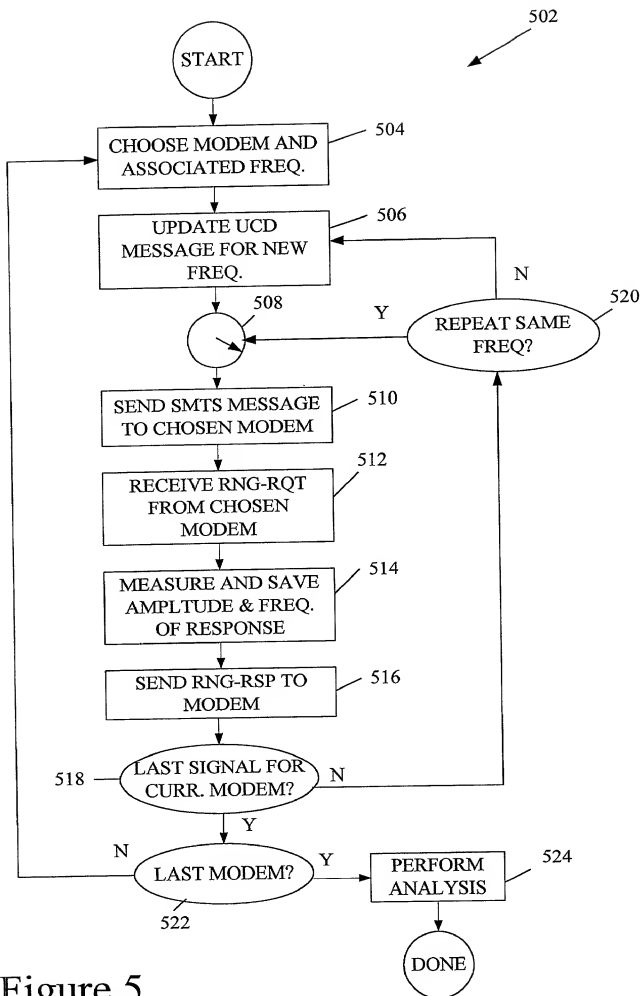







Figure 5

Frequency

Modem No.	5.4 MHz	6.9 MHz	10 MHz	11.5 MHz	13 MHz	
2	0	-2	-4	+2	+2	
7	0	+2	0	0	-2	
11	0	0	-2	-2	-2	
14	0	+2	+2	-4	-4	
18	0	+4	-6	0	-2	

dB Change

Figure 6

**DECLARATION AND POWER OF ATTORNEY
FOR ORIGINAL U.S. PATENT APPLICATION**

Attorney's Docket No. CISCP124/1691

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **CABLE PLANT CERTIFICATION PROCEDURE USING CABLE MODEMS**, the specification of which,

- (check one)
1. ☒ is attached hereto.
 2. ☐ was filed on _____ as
U.S. Application No. _____
and was amended on _____.
 3. ☐ was filed on _____ as
International PCT Application No. _____
and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, CFR § 1.56.

I hereby claim foreign priority benefits under Title 35, United States code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Benefits Claimed?

☐ Yes ☐ No

(Appl. No.)

(Country)

(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)

(Application No.)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s)

(Application No.)

(Filing Date)

(Status - patented, pending, abandoned)

And I hereby appoint the law firm of **Beyer & Weaver, LLP** and all practitioners who are associated with the Customer Number 022434 as my principal attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Direct Correspondence To:

Customer Number: 022434

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306



Direct Telephone Calls To:

Jeffrey K. Weaver at telephone number (510) 843-6200

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Typewritten Full Name of

First Joint Inventor:

Mark E. Millet

Citizenship: U.S.

Inventor's signature:

Mark E. Millet

Date of Signature: 1-18-2000

Residence: (City)

Mountain View

(State/Country) CA/USA

Post Office Address:

1946 Miramonte Avenue, Mountain View, CA 94040

Typewritten Full Name of

Second Joint Inventor:

Gunter E. Roeck

Citizenship: Germany

Inventor's signature:

Gunter E. Roeck

Date of Signature: 1/25/00

Residence: (City)

San Jose

(State/Country) CA/USA

Post Office Address:

4108 Amos Way, San Jose, CA 95135

Typewritten Full Name of
Third Joint Inventor:

Chrisanto Leano

Citizenship: U.S.

Inventor's signature:

Chrisanto Leano

Date of Signature: 11/25/2006

Residence: (City)

San Jose

(State/Country) CA/USA

Post Office Address:

4626 Marbella Court, San Jose, CA 95124

Typewritten Full Name of
Fourth Joint Inventor:

James A. Clark

Citizenship: U.S.

Inventor's signature:

Date of Signature: _____

Residence: (City)

Cumming

(State/Country) GA/USA

Post Office Address:

4110 Three Chimneys Lane, Cumming, GA 30041

**DECLARATION AND POWER OF ATTORNEY
FOR ORIGINAL U.S. PATENT APPLICATION**

Attorney's Docket No. CISCP124/1691

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **CABLE PLANT CERTIFICATION PROCEDURE USING CABLE MODEMS**, the specification of which,

- (check one)
1. ☒ is attached hereto.
2. ☐ was filed on _____ as
U.S. Application No. _____
and was amended on _____.
3. ☐ was filed on _____ as
International PCT Application No. _____
and was amended on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, CFR § 1.56.

I hereby claim foreign priority benefits under Title 35, United States code, § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Benefits Claimed?

☐ Yes ☐ No

(Appl. No.)

(Country)

(Filing Date)

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Prior Provisional Application(s)

(Application No.)

(Filing Date)

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s)

(Application No.)

(Filing Date)

(Status - patented, pending, abandoned)

And I hereby appoint the law firm of **Beyer & Weaver, LLP** and all practitioners who are associated with the Customer Number 022434 as my principal attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Direct Correspondence To:

Customer Number: 022434

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306



Direct Telephone Calls To:

Jeffrey K. Weaver at telephone number (510) 843-6200

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Typewritten Full Name of

First Joint Inventor:

Mark E. Millet

Citizenship: U.S.

Inventor's signature:

Date of Signature:

Residence: (City)

Mountain View

(State/Country) CA/USA

Post Office Address:

1946 Miramonte Avenue, Mountain View, CA 94040

Typewritten Full Name of

Second Joint Inventor:

Guenter E. Roeck

Citizenship: Germany

Inventor's signature:

Date of Signature:

Residence: (City)

San Jose

(State/Country) CA/USA

Post Office Address:

4108 Amos Way, San Jose, CA 95135

Typewritten Full Name of
Third Joint Inventor:

Chrisanto Leano

Citizenship: U.S.

Inventor's signature:

Date of Signature:

Residence: (City)

San Jose

(State/Country) CA/USA

Post Office Address:

4626 Marbella Court, San Jose, CA 95124

Typewritten Full Name of
Fourth Joint Inventor:

James A. Clark

Citizenship: U.S.

Inventor's signature:

James A. Clark

Date of Signature: 12/24/99

Residence: (City)

Cumming

(State/Country) GA/USA

Post Office Address:

4110 Three Chimneys Lane, Cumming, GA 30041

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of: Mark E. Millet

Attorney Docket No.: CISC124/1691

Application No.: To Be Assigned

Examiner: To Be Assigned

Filed: HERewith

Group: To Be Assigned

Title: Cable Plant Certification Procedure Using
Cable ModemsJCS78 U.S. PTO
09/493405
01/28/00

CERTIFICATE OF MAILING

I hereby certify that this paper and the documents and/or fees referred to as attached therein are being deposited with the United States Postal Service on January 28, 2000 in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR §1.10, Mailing Label Number **EL065189447US**, addressed to the Assistant Commissioner for Patents, Washington, DC 20231.

Signed:

Dionna Holmes

Dionna Holmes

ASSOCIATE POWER OF ATTORNEY

Assistant Commissioner for Patents
BOX PATENT APPLICATION
Washington, DC 20231

Sir:

The undersigned attorney of record in the subject patent application hereby grants an Associate Power of Attorney to add Robert Barr, Registration No. 32,292, of Cisco Technology, Inc., and all practitioners who are associated with the **Customer Number 022434** to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Please send all correspondence for this application as follows:

Customer Number 022434

BEYER & WEAVER, LLP
P.O. Box 61059
Palo Alto, CA 94306

Please direct any calls to **Jeffrey K. Weaver** (510) 843-6200.

Respectfully submitted,
BEYER & WEAVER, LLP

Joseph M. Villeneuve

Joseph M. Villeneuve
Reg. No. 37,460

P.O. Box 61059
Palo Alto, CA 94306
(510) 843-6200